


D92040

Standard Battery Pack Li-Ion
10.80V / 3.35Ah / 36.20Wh

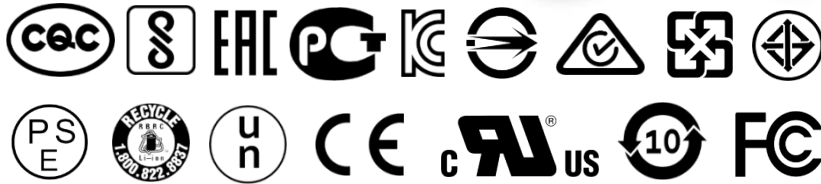

Features

- Worldwide approvals and certification of safety standards
- No development costs, fast time-to-market
- Smart batteries with numerous features according to the SMBus specification
- Integrated LED State of Charge (SoC) indicator
- State-of-the-art lithium-ion cells with the market’s highest energy density
- High discharge performance
- JEITA charging profile optimization
- Numerous and redundant safety features, e.g.:
 - CUV (Cell Under Voltage): protection against deep discharge
 - COV (Cell Over Voltage): protection against over charge
 - OTC (Over Temperature in Charge): protection against overheating while charging
 - OTD (Over Temperature in Discharge): protection against overheating during discharging
 - Battery Life Management: protection against rapid cell ageing
- Increased ESD protection up to 8.00kV
- SHA-1 cryptosystem to prevent plagiarism

Applications

Suitable for use with tablet PC’s, notebooks, industrial and medical devices, etc.

Specification


General	
Delivery status battery capacity	<30%
Compliance information	IEC 62133 / CE / UL2054 / FCC / PSE / KC / BSMI / Gost / EAC / CQC / RCM / BIS / TISI / UN 38.3 / RoHS / REACH
Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 50°C max. -20°C to 25°C recommended

Electrical Parameters	
Nominal voltage	10.80V
Nominal capacity	3.35Ah
Initial impedance	Max. 350mΩ @ 1kHz at 25°C
Max. charge current	2.35A
Max. charge voltage	12.60V
Cont. discharge	4.00A
Peak discharge	4.80A
Life expectancy @ 25°C 1.625A Charge/3.25A Discharge	300 cycles with ≥ 63% of initial capacity

Battery Dimensions	
Length	84.87mm +0.25/-0.25
Width	58.76mm +0.25/-0.25
Thickness	21.89mm +0.50/-0.25
Weight	170g
Contacts	+, C, D, T, -

Safety Parameters PCM	
Overcharge detection voltage / cell	4.25V
Overcharge release voltage / cell	4.00V
Overdischarge detection voltage / cell	2.50V
Overdischarge release voltage / cell	2.75V
Overcharge detection current	3.00A
Overdischarge detection current	4.80A



Recommended Accessories

Type	Product	P/N	Application
Standard Battery Charger	 SMB-UBC	D90481	65.00W standard battery charger for optimized charging process with external power supply for world-wide use.
Standard Battery Charger	 SMB-MBC	D90515	50.00W standard battery charger for optimized charging process with external power supply for world-wide use.
Power Management Module	 PMM240	D90513	Power management module for smart battery charging with automatic power source selection. 82.00W max. output power to battery and 240.00W max. output power to application. Fits to all 20XX standard smart batteries.
Power Supply AC/DC	 PS65	210919	External power supply (worldwide use) for embedded battery charger RRC-PMM240 or for mobile devices. Included in RRC-SMB-UBC/MBC.
AC Power Cable	 USA/CAN/JPN EU/KOR UK/SGP AUS/NZL	210950 210951 211333 211334	Country specific power cable for PS65.
Car Adapter DC/DC	 SMB-CAR	D90554	90.00W car adapter with USB charging port. Power supplying in cars and trucks for SMB-UBC, SMB-MBC, PMM240 or mobile devices
Design-In Tool	 SMBus Reader	D90534	Simple read out of SMBus batteries data. No external power supply required. 5way blade connector and RS232 interface.

TECHNICAL DATA SHEET

D92040



Type	Product	P/N	Application
Battery Connector	 SMBus Battery Cable	D90508	Extension cable for battery applications. Suitable for D9204X and D9205X batteries.
Battery Mating Connector	 MC20-90-10 MC20-180-10	D90536 D90537	Mating Connector for standard smart batteries (e.g. D92020, D92054, ...). Available for 90° or 180° PCB mounting.

305 Commerce Dr • Suite 300 • Exton, PA 19341 • 800.771.7139 • www.cell-con.com