


D92140

Standard Battery Pack Li-Ion
 11.40V / 3.88Ah / 44.20Wh

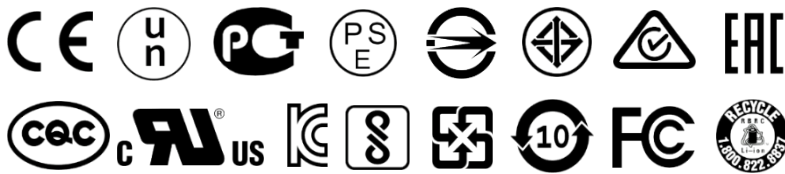

Features

- Slim and flat standard battery pack with higher capacity and lower height than round cell packs with similar energy
- Allows to develop smaller and thinner portable devices with long runtime
- SMBus & SBDS Rev 1.1 compliant
- Fulfils JEITA standards, advanced temperature-dependent charging profile
 - Fastest charging
 - Maximized cycle life
- Impedance tracking and cell balancing
 - No manual recalibration necessary
 - Longest lifetime
- Comprehensive charging/discharging and passive safety systems
- Worldwide approvals
- Registered with recycling systems worldwide

Applications

Suitable for use in slim devices for industrial and medical applications, etc.

Specification






General	
Delivery status battery capacity	30%
Compliance information	IEC 62133 / CE / UL2054 / FCC / Gost / PSE / BSMI / TISI / RCM / EAC / CQC / KC / BIS / UN38.3 / RoHS / REACH
Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 60°C max. -20°C to 25°C recommended

Electrical Parameters	
Nominal voltage	11.40V
Nominal capacity	3.88Ah
Initial impedance	<200mΩ @ 1kHz at 20°C
Max. charge current	2.70A
Max. charge voltage	13.05V
Cont. discharge	3.78A
Max. discharge	5.67A
Life expectancy @ 25°C 1.90A Charge/0.75A Discharge	>300 cycles with ≥ 85% of initial capacity

Battery Dimensions	
Length	212.90mm +0.5/-0.5
Width	86.20mm +0.4/-0.4
Thickness	8.35mm +0.25/-0.25
Weight	<255g
Contacts	+, +, C, D, T, -, -

Safety Parameters PCM	
Overcharge detection voltage / cell	4.39V
Overcharge release voltage / cell	4.20V
Overdischarge detection voltage / cell	2.75V
Overdischarge release voltage / cell	3.25V
Overcharge detection current	3.10A
Overdischarge detection current	6.00A

Recommended Accessories

Type	Product	P/N	Application
Standard Battery Charger	 SMB-FPC	D90558	40.00W standard battery charger for optimized charging process with external power supply for world-wide use.
Battery Mating Connector	 MC21-90-10 MC21-90-20	D90555 D90556	Mating Connector for standard smart batteries D92130, D92140. Available for 90° PCB mounting (top and edge).
Power Supply AC/DC	 PS65	D90540	External power supply (worldwide use) for embedded battery charger PMM240 or for mobile devices. Included in SMB-FPC.
AC Power Cable	 USA/CAN/JPN EU/KOR UK/SGP AUS/NZL	210950 210951 211333 211334	Country specific power cable for PS65.
Car Adapter DC/DC	 SMB-CAR	D90554	90.00W car adapter with USB charging port. Power supplying in cars and trucks for SMB-FPC, PMM240 or mobile devices